

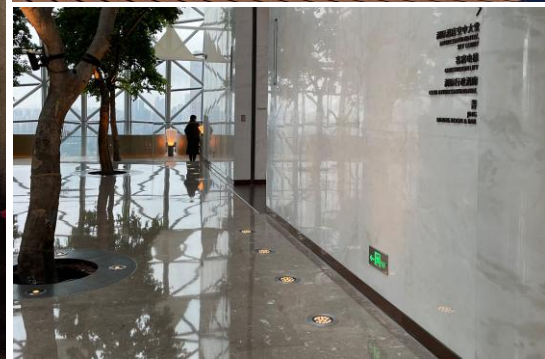


**FOCOS EMPOTRABLES IP-68
ACERO INOXIDABLE**


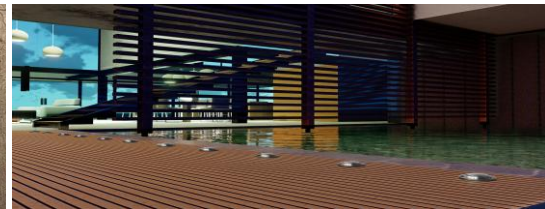


REF:M-03

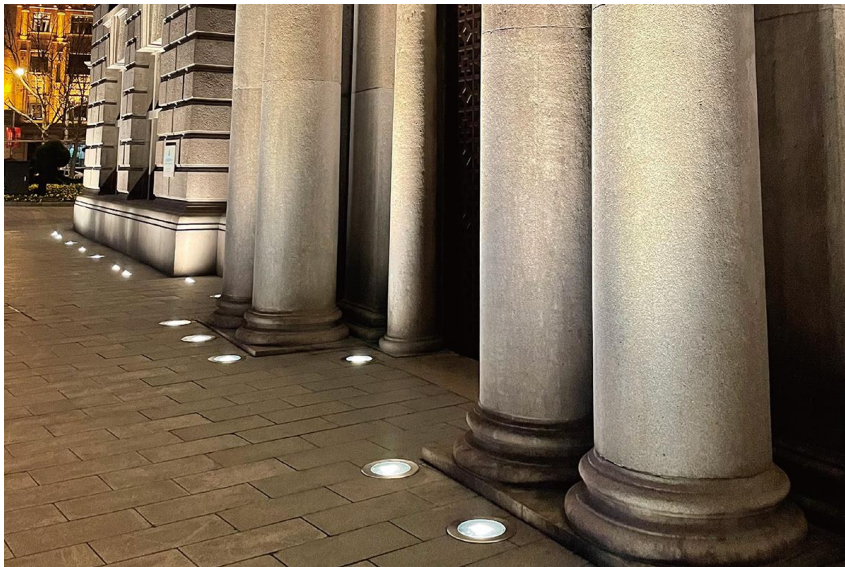

EMPOTRABLE LED M-03
6W-4000K 100LM/W-Nº LEDS:3
MATERIAL:ALUMINIO Y INOXIDABLE 316
IP:68 IK-10
VIDIO TEMPLADO
VOLTAJE:220V

600Lm




REF:M-04



EMPOTRABLE LED M-04
12W-4000K 100LM/W-Nº LEDS:6
MATERIAL:ALUMINIO Y INOXIDABLE 316
IP:68 IK-10
VIDIO TEMPLADO
VOLTAJE:220V

1200Lm




REF:M-05



EMPOTRABLE LED M-05
25W-4000K 100LM/W-Nº LEDS:12
MATERIAL:ALUMINIO Y INOXIDABLE 316
IP:68 IK-10
VIDIO TEMPLADO
VOLTAJE:220V

2500Lm



DESCRIPCION

- Cuerpo de aluminio fundido a presión, marco de acero inoxidable 304.
- Vidrio templado endurecido de 10 mm más alto, asegura pasar la prueba estándar IK10.
- Anillo de goma de silicona resistente a altas temperaturas e impermeable, carcasa de instalación de plástico PP resistente a la corrosión.
- Luminaria empotrable de suelo/suelo/pared aplicaciones previstas según necesidad.
- Sin riesgo fotobiológico, según EN 62471:2008.
- Todos los tornillos externos están hechos de acero inoxidable 304.